

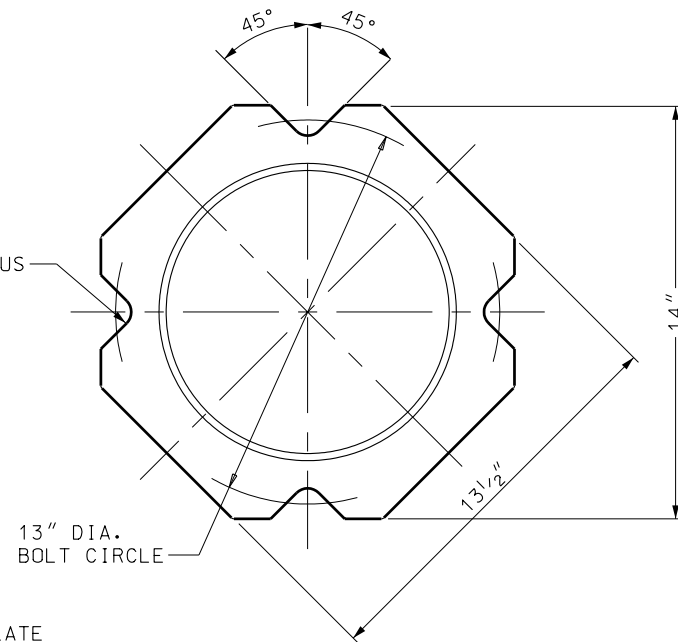


D:\N\Standard Drawings\Imperial\Approved\Change\Approved\SL15.dgn 29-JAN-2004

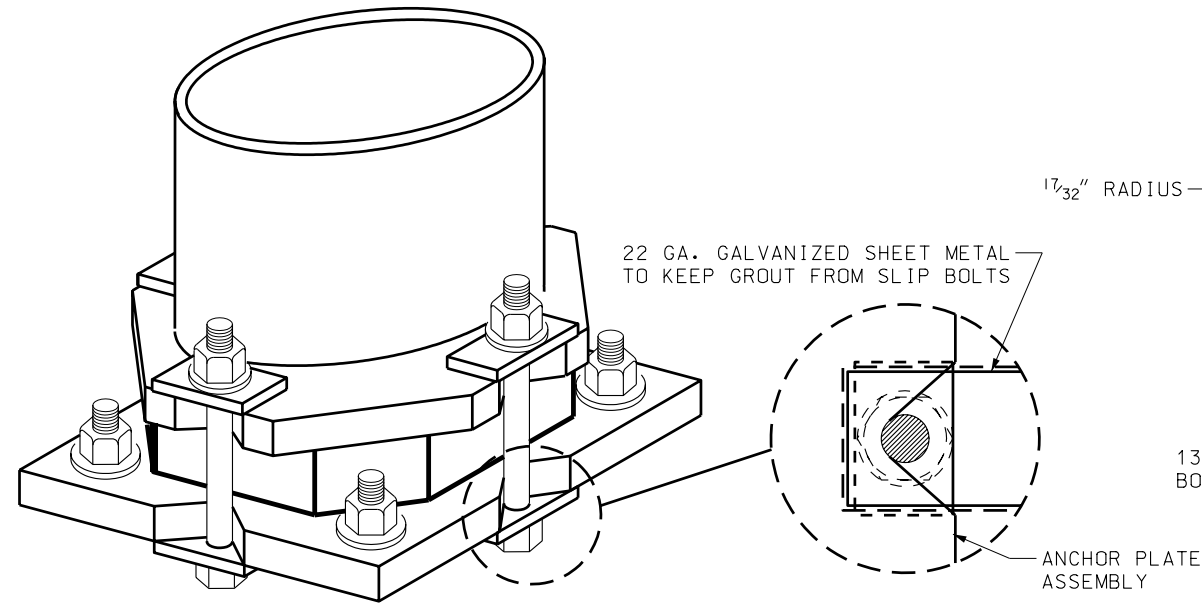

POLE BASE PLATE

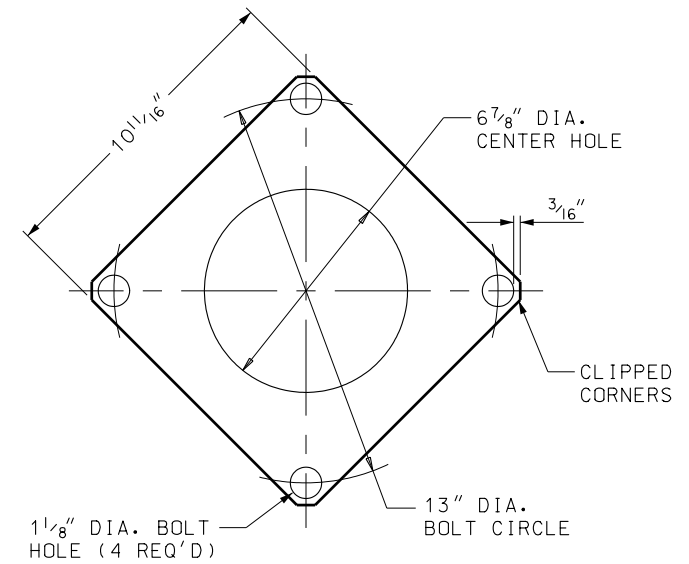

KEEPER PLATE
(28 GAUGE STAINLESS STEEL)



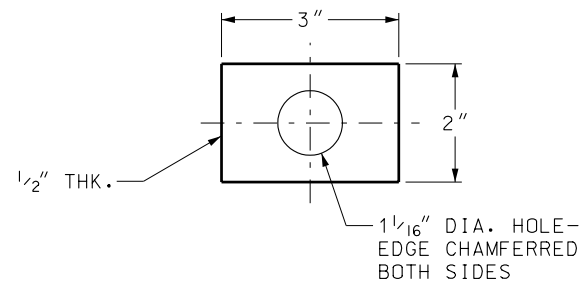


PLATE WASHER

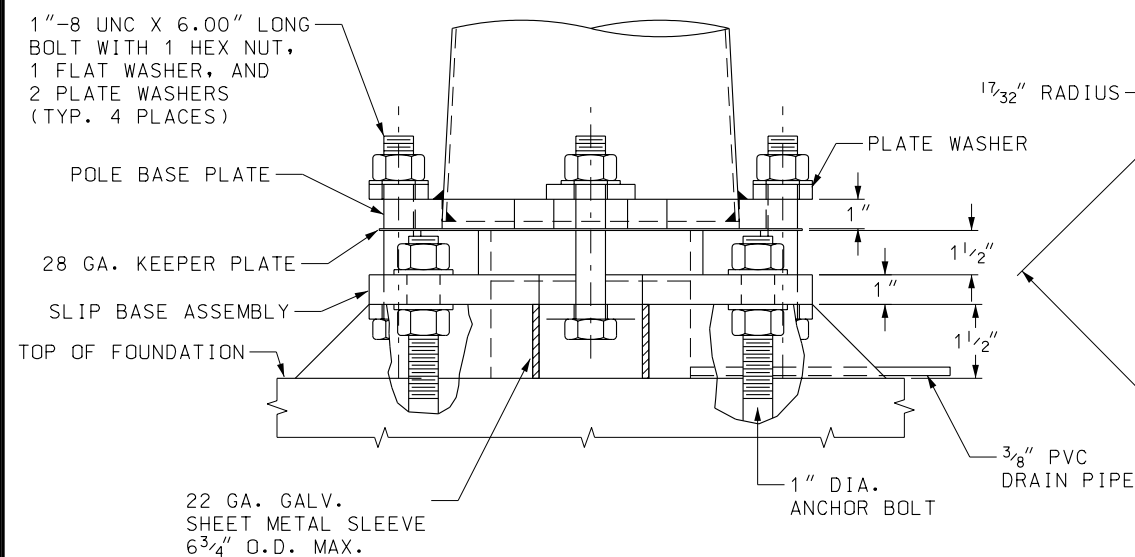

SLIP BASE DETAIL

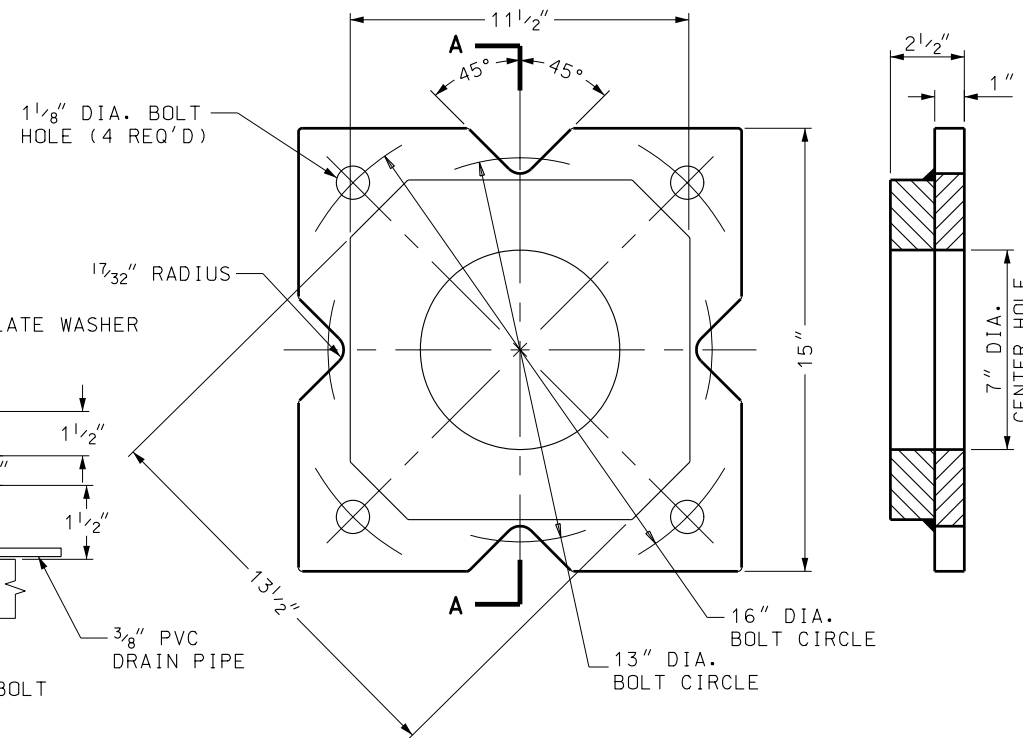

SLIP BASE ASSEMBLY

SECTION A - A

NOTES:

1. PLACE ANCHOR PLATE ASSEMBLY ON ANCHOR BOLT LEVELING NUTS AND SECURE IN PLACE.
2. ERECT LIGHT POLE AND SECURE WITH 1 INCH DIA. HIGH STRENGTH BOLTS. INSTALL BOLTS IN THE SLOTS SO THE BOLT SHANKS ARE IN CONTACT WITH THE LIGHT POLE PLATE AND ANCHOR PLATE ASSEMBLY.
3. ALL STEEL MATERIALS INCLUDING ANCHOR BOLT THREADS ARE HOT-DIPPED GALVANIZED. AVOID DAMAGING THE GALVANIZED FINISH OF MATERIALS DURING TRANSPORT AND PLACEMENT.
4. TORQUE ALL SLIP BOLTS TO 80 FT LBS, RELEASE AND RETORQUE TO 70 FT LBS.
5. INSTALL DRY PACK GROUT AFTER LIGHT POLE IS PLACED IN FINAL POSITION.

REVISIONS		NO.	DATE	APPR.	REMARKS
1	12/18/03	LM			ENTIRE DRAWING MODIFIED, TITLE CHANGED.

UTAH DEPARTMENT OF TRANSPORTATION		DEC.18,2003	DATE
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION			
SALT LAKE CITY, UTAH		DEC.18,2003	DATE
RECOMMENDED FOR APPROVAL			
CHAIRMAN STANDARDS COMMITTEE			
APPROVED			
DEPUTY DIRECTOR			

LUMINAIRE
SLIP BASE
DETAIL

STANDARD DRAWING TITLE